

Identifying communities at risk for COVID-19-related burden across 500 U.S. Cities and within New York City

Supplementary Information, Figures, and Tables

Supplementary Table 1. Distribution of C19 Risk Score constituent diseases and health indicators among 500 Cities census tracts. Pct: percentile. SD: Standard Deviation

Supplementary Table 2. Distribution of C19 Risk Score constituent diseases and health indicators for each of the 500 Cities. Pct: percentile. SD: Standard Deviation.

Located online here:

https://docs.google.com/spreadsheets/d/1mEgyBQkqSOeb9qO1lj9tTkOWqdkL_38RigIDFxO_bJg/edit?usp=sharing

Supplementary Table 3. Principal component loadings for the first two principal components of the C19 Risk Score constituent diseases and health indicators

Supplementary Figure 1. City-level Median C19 Risk Score versus difference in 75th percentile vs. 25th percentile C19 Risk Score.

Appendix. Application Programming Interface Endpoints and COVID-19 Community Risk Score Web-Based Dashboard


Supplementary Table 1. Distribution of C19 Risk Score health indicators among 500 Cities census tracts. Pct: percentile. SD: Standard Deviation

Health Indicator	Median	Low	High	25 Pct	75 Pct	SD
BP Medication	0.718	0.096	0.927	0.668	0.759	0.079
High Cholesterol	0.317	0.07	0.554	0.288	0.344	0.049
Obesity	0.296	0.096	0.586	0.245	0.357	0.082
High BP	0.295	0.053	0.703	0.253	0.349	0.083
Arthritis	0.21	0.024	0.584	0.174	0.251	0.060
Smoking	0.171	0.020	0.503	0.134	0.217	0.061
Female Over 65	0.137	0.000	1.000	0.096	0.187	0.079
Male Over 65	0.107	0.000	1.000	0.074	0.149	0.070
Diabetes	0.101	0.008	0.395	0.079	0.13	0.043
Chronic Asthma	0.095	0.056	0.178	0.085	0.108	0.017
COPD	0.058	0.01	0.238	0.045	0.076	0.025
Cancer	0.055	0.007	0.224	0.045	0.066	0.018
Heart Disease	0.053	0.004	0.358	0.042	0.067	0.021
Kidney Disease	0.029	0.007	0.123	0.025	0.036	0.010
Stroke	0.029	0.003	0.195	0.023	0.038	0.015

Supplementary Table 3. Principal component loadings for the first two principal components of the C19 Risk constituent diseases and health indicators

Health Indicator	Rotation 1	Rotation 2
Cancer	0.16	-0.43
Arthritis	0.3	-0.13
Stroke	0.31	0.09
Asthma	0.2	0.3
COPD	0.3	0.12
Heart Disease	0.32	-0.05
Diabetes	0.3	0.13
Kidney Disease	0.31	0.07
Blood pressure medication	0.26	-0.22
Smoking	0.21	0.36
High Blood Pressure	0.32	0.02
Obesity	0.24	0.31
High Cholesterol	0.27	-0.21
Male > 65	0.12	-0.42
Female > 65	0.14	-0.41

Supplementary Figure 1. City-level Median C19 Risk Score versus difference in 75th percentile vs. 25th percentile C19 Risk Score.

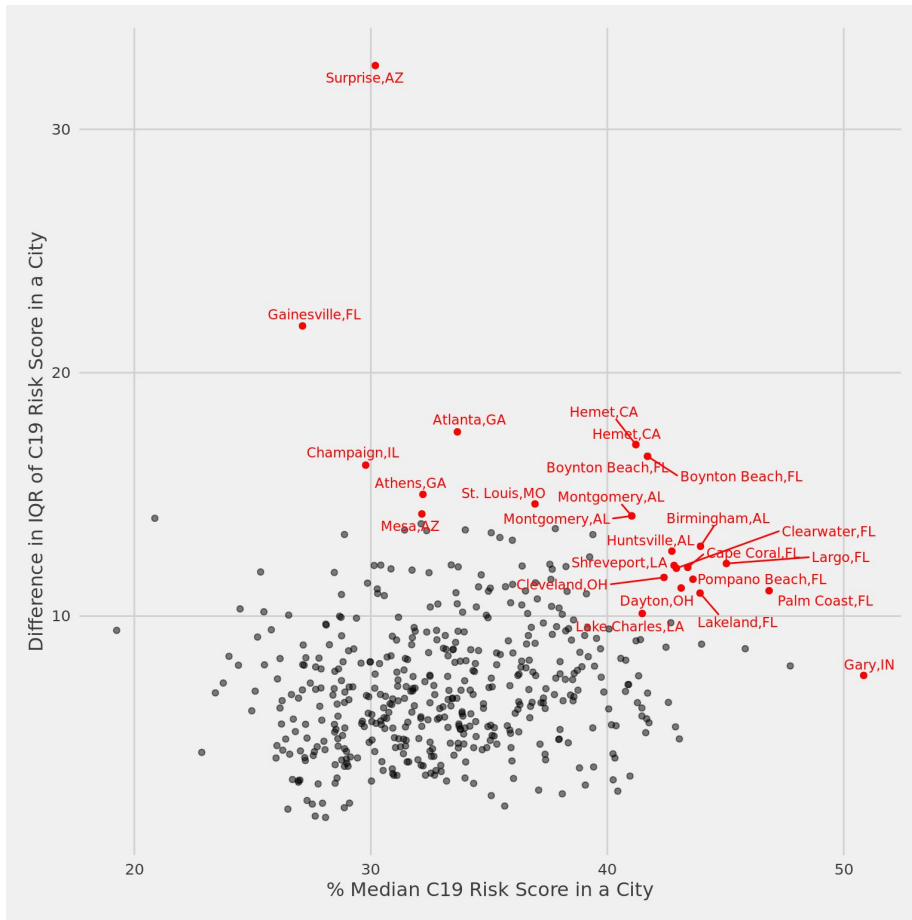

Appendix.

Application Programming Interface (API) Specification for the COVID-19 Risk Score

1. Overview

The XY.ai COVID-19 Community Risk Score is a population-level model that ranks communities by their risk of COVID-19-related morbidity and mortality using chronic disease prevalence and demographic characteristics, summarizing information from ~134 million people. The risk score is accessed by geographical indicators, such as state, city, county, FIPS, and zip code. The COVID-19 Community Risk Score can be used to help predict community-level burden of disease, serve as a prior probability in individual-level risk models, and assist with resource allocation efforts.

The API (version 0.7) includes the XY.ai COVID-19 Community Risk Score (modelled at the state, city, county, and census tract level), underlying disease prevalence data from the CDC (census-tract estimates derived from the Behavioral Risk Factor Surveillance System (BRFSS) of the CDC 500 Cities Project, and demographic data from the U.S. Census/American Community Survey.


2. Dashboard and API Specification

2.1 Interactive Online COVID-19 Community Risk Score Dashboard

The interactive dashboard can now be found at the following URL:

<https://dashboard.xyai-health.com>

Information is displayed in interactive choropleths, as well as histograms and graphs that can be toggled on and off, allowing the user to quickly change between different datasets on the map. Additionally, summary statistics for cities can be retrieved and visualized, and COVID-19 cases are graphed as a function of the COVID-19 Community Risk score.

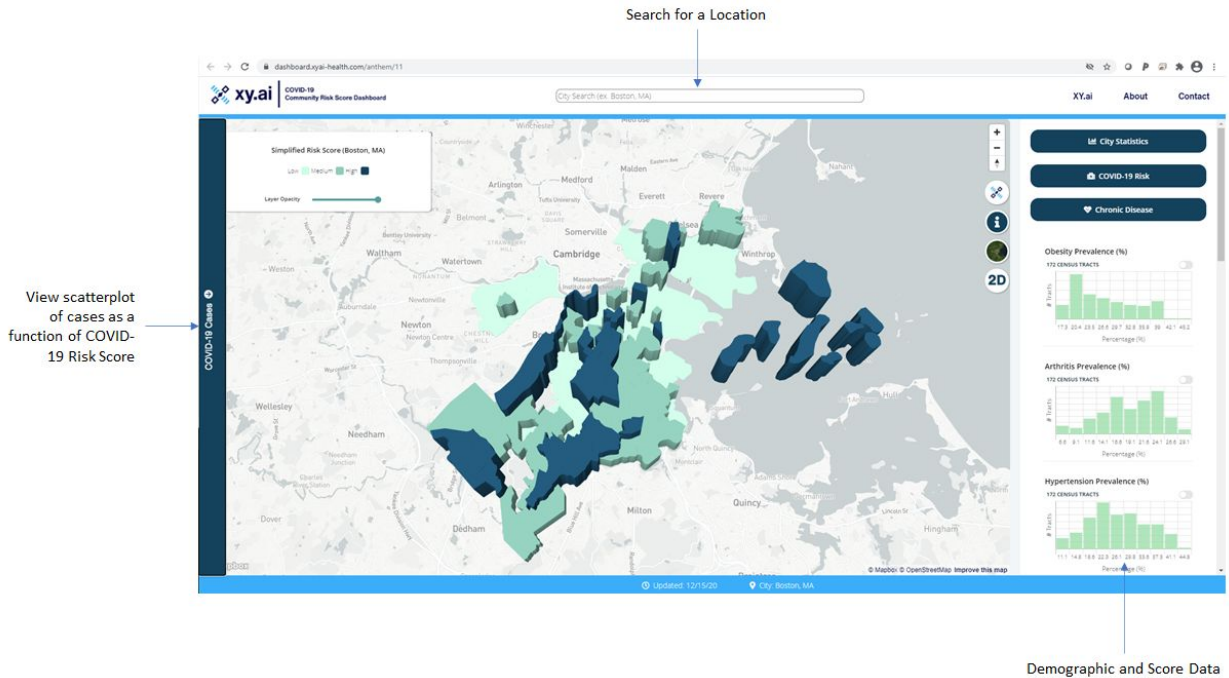

The interactive dashboard, accessed at <https://dashboard.xyai-health.com>.

2.2 API Specification

The API is now deployed at the following URL:

<https://api.xyai-health.com/{endpoint}>

The API accepts JSON (POST only, GET has been disabled) parameters and returns JSON output. The current endpoints are as follows:

Endpoint https://api.xyai-health.com	Parameters (POST)	Output
/	None	Displays interactive dashboard
/status	None	Should return "OK" if the API is up
/state	JSON: {“value”: “stateval”} stateval: MA, TX... or a state name (Maine, Texas, etc) or state FIPS code (01, 02, 04...)	See JSON Output Object (v0.7) below
/city	JSON: {“value”: “cityval”}	See JSON Output Object (v0.7) below

	cityval: Boston, Seattle, Austin, etc.	
/zipcode	JSON: {"value": " zipcode "}	See JSON Output Object (v0.7) below
	Zipcode: 02577, etc.	
/fips	JSON: {"value": " fips "}	See JSON Output Object (v0.7) below
	FIPS code: 01073000400, etc.	
/coord	JSON: {"latitude": " latval ", "longitude": " longval "}	See JSON Output Object (v0.7) below
	Ex. For Boston: Latitude: 42.361145 Longitude: -71.057083	
/county	JSON: {"value": " fips "}	See JSON Output Object (v0.7) below
	5 digit county fips: 01073, 01083, ...	
/hospitals	JSON: {"state": " MA "}	Hospitals, filtered by state, and optionally county
	or {"state": " MA ". "county": "Suffolk"}	
/hospitals/icu	JSON: {"state": " MA "}	ICU statistics by county
/batchstate	JSON: {"value": " stateval "}	See JSON Output Object (v0.7) below
	stateval: MA, TX... or a state name (Maine, Texas, etc) or state FIPS (01, 02, 04...)	
/batchcounty	JSON: {"value": " stateval "}	See JSON Output Object (v0.7) below
	stateval: MA, TX... or a state name (Maine, Texas, etc) or state FIPS (01, 02, 04...)	
/map/<state>/<city>/<zoom>	state: MA, TX... or a state name (Maine, Texas, etc) or state FIPS (01, 02, 04...)	HTML Output that can be embedded in an iframe
	city: Boston, Austin, etc.	
	zoom: between 1-18 (1 = the globe, 18 = close to street)	

JSON Output Object (Version 0.7)

Endpoint:

/state

POST Data:

```
{"value": "California"}
```

or

```
{"value": "CA"}
```

or

```
{"value": "06"}
```

Output Example:

```
[
  {
    "ARTHRITIS_CrudePrev": 0.181295,
    "BPHIGH_CrudePrev": 0.26661,
    "BPMED_CrudePrev": 0.664413,
    "CANCER_CrudePrev": 0.054201,
    "CHD_CrudePrev": 0.0,
    "COPD_CrudePrev": 0.0,
    "CSMOKING_CrudePrev": 0.138423,
    "DIABETES_CrudePrev": 0.097323,
    "HIGHCHOL_CrudePrev": 0.303718,
    "KIDNEY_CrudePrev": 0.029097,
    "OBESITY_CrudePrev": 0.249389,
    "STROKE_CrudePrev": 0.027094,
    "covid19_risk_score": 16.843503,
    "rank": 7,
    "robustness": "NA",
    "state": "CA",
    "version": "0.7"
  }
]
```

JSON Batch Output Object (Version 0.7)

Endpoint:

/batchstate

POST Data:

```
{"value": "California"}
```

or

```
{"value": "CA"}
```

or

```
{"value": "06"}
```

Output Example:

```
[{"data": [
  {
    "ARTHRITIS_CrudePrev": 18.6,
    "ARTHRITIS_pred": 16.5,
    "BPHIGH_CrudePrev": 25.9,
    "BPHIGH_pred": 23.67,
    "BPMED_CrudePrev": 70.0,
    "BPMED_pred": 65.87,
    "CANCER_CrudePrev": 7.2,
    "CANCER_pred": 4.85,
    ...
    "geoid": "06073017030",
  }
]
```



```
...
  "total_population": 23397
},
{
  "ARTHRITIS_CrudePrev": 21.8,
  "ARTHRITIS_pred": 18.76,
  ...
}
},
"state": "CA",
"version": "0.7"
}]
```

Description:

covid19_risk_score: XY’s COVID-19 community risk score for the region (in this example, state)

City_rank, state_rank, country_rank: the rank of a particular entity (census tract, county, city, state, etc) relative to the next higher-up geographical grouping.

The “**crudeprev**” fields are crude average weighted prevalences of conditions in a given area (state, city, etc) where: “*bphigh*” to high blood pressure, “*bpmed*” to prevalence of the population on blood pressure medication, “*chd*” to prevalence of heart disease, *csmoking* of the prevalence of the smoking, *highchol* to high cholesterol.

The “**pred**” fields are the values predicted from XY's deep-learning pipeline.

The “**version**” field corresponds to the version of the API.

3. Using the Public API / Docker

To call an API endpoint, simple queries can be executed as follows (in Python 3):

```
import requests

# configure
requests.packages.urllib3.disable_warnings(requests.packages.urllib3.exceptions.InsecureRequestWarning)

# get data (change to https://localhost for docker)
res = requests.post('https://api.xyai-health.com/coord', json={"latitude": "42.361145", "longitude": "-71.057083"},
                    verify=False).json()

# print out a value
print(res[0]["COPD_CrudePrev"])
```

Data can also be easily accessed using cURL (one line):

```
curl -d '{"value": "MA"}' -H 'Content-Type: application/json' https://api.xyai-health.com/state
```